


# Media Converters

D A T A  
S H E E T

MIL-185C Multi-Mode ATM Fiber/  
UTP Converter OC-3 Speed (155 Mbps)

MIL-195C Single-Mode ATM Fiber/  
UTP Converter OC-3 Speed (155 Mbps)

- Physical layer product (protocol independent)
- OC-3 speeds (155Mbps)
- Converts electrical signals to optical signals and vice versa.
- Physical layer product designed specifically for ATM Networks
- OC-3 speeds (155Mbps)
- Converts electrical signals to optical signals and vice versa
- Add fiber when you need it and where you need it
- 5 year warranty

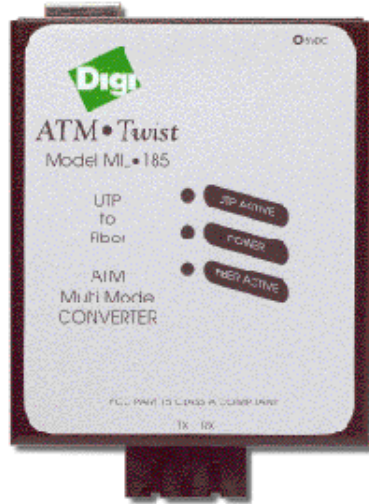

Digi's MIL-185C UTP to multi-mode fiber optic converter is an OC-3 speed converter that converts electrical signals to optical signals. The MIL-185C has a compact form-factor and is shipped with an external power source.

Digi's MIL-195C UTP to single-mode fiber optic converter is an OC-3 speed converter that converts electrical signals to optical signals. The MIL-195C has a compact form-factor and is shipped with an external power source.

The MIL-185C and MIL-195C allow for using less expensive UTP Ports on ATM NIC's or switches and utilize single or multi mode fiber when and where it is needed.

These products convert OC-3 electrical signals used in UTP wires, to optical signals used in single or multi mode fiber optics cables. The allowable fiber optic cable distance is 15km for the single mode and 2km for the multi mode. The allowable UTP category 5 wire is 100 meters.



# Features/Specifications

## Features

- Unshielded Twisted Pair (UTP) to single/multi-mode fiber converter
- OC-3 (155Mbps) speed
- Fiber budget sufficient to drive 15km for single-mode fiber/2km for multi-mode fiber
- One shielded RJ-45 connector
- One SC-type single-mode or multi-mode fiber connector
- Three (3) LEDs indicating power and port status
- External 5 volt DC power supply included

## Product Package

- Installation guide

## LED's

- TP ACTIVE—A valid link is detected on the receive line of the UTP port when this LED illuminates.
- POWER—Unit is receiving power when this LED illuminates.
- FIBER ACTIVE—A valid link is detected on the receive line of the fiber port when this LED illuminates.

## Fiber Specifications

### MIL-185C

- Wave length—1300nm
- Launch Power— -14dBm
- Receiver Sensitivity— 31dBm
- Multimode Cable—62.5/125

### MIL-195C

- Wave length—1300nm
- Launch Power— -8.0dBm
- Receiver Sensitivity— 31dBm
- Single mode Cable— 8/9nm/125nm

## UTP Specifications

- Shielded RJ-45 8Pin Connector
- Recommend to use with shielded Cat.5 UTP cable

## External Power Supply

- 110/220 VAC input
- Supplied with unit
- Nominal 5+ 0.25 volts
- Board draw 900mA at normal operation in a room temperature of 25° C

## Standards Compliance

- FCC Class A
- UL 1950
- CSA 22 No. 950
- EN60950
- CE
  - EN55022 Class B
  - EN50082-1

## Environment

- Operating temperature: to 105°F (0°C to 40°C)
- Relative humidity: to 95% humidity, non-condensing
- Altitude: to 40,000 feet (0 to 12,192 meters)

## Digi Service And Support

You can purchase with confidence knowing that Digi is here to support you with expert technical support, the industry's strongest warranty (five full years) and a 30 day money-back guarantee.

## Digi International Corporate:

11001 Bren Road East  
 Minnetonka, MN 55343  
 Tel: 1-800-344-4273  
 612-912-3444  
 FAX: (612) 912-4952  
 E-Mail: [info@dgii.com](mailto:info@dgii.com)  
 Web: [www.dgii.com](http://www.dgii.com)

## Regional Sales offices

Minnesota: 1-800-344-4273  
 California: 1-800-466-4526  
 Ohio: 1-800-782-7428  
 Tennessee: 1-800-366-8844  
 Virginia: (703) 553-2560

## International Sales offices:

Denmark: +45 49 17 70 90  
 France: +33 1 46 40 39 20  
 Germany: +49 221 920 520  
 The Netherlands: +31 20 5207 566  
 United Kingdom: +44 1276 853 600  
 Australia: +61 2 96 80 8944  
 Hong Kong: +852 2833 1008  
 Singapore: +65 732 1318  
 Email: [europa@dgii.com](mailto:europa@dgii.com)  
[latinamerican@dgii.com](mailto:latinamerican@dgii.com)  
[pacificriminfo@dgii.com](mailto:pacificriminfo@dgii.com)

## Dimensions

Height	Width	Depth	Weight
1 in.	3 in.	3.5 in.	Unit 4.5 oz.

## Models and Part Numbers

MIL-185C . . . . .	Domestic (110V Power Supply)
MIL-185CIN . . . . .	International (220V Power Supply)
MIL-195C . . . . .	Domestic (110V Power Supply)
MIL-195CIN . . . . .	International (220V Power Supply)

© 1998 Digi International. All rights reserved. The Digi logo is a registered trademark of Digi International. All other brand names and product names are trademarks or registered trademarks of their respective holders. GSA: GS-35F-3395D.

